

Resene product labels are updated from time to time. This label is provided as a guide for this product and may differ from the label on the container you purchase.

Please discuss your project with your local Resene ColorShop team or reseller to ensure you have the right products to give you the best quality finish for your specific project.

net contents 4 litres

**WARNING**  
KEEP OUT OF REACH OF CHILDREN

# Resene

## AquaLAQ

### NGR Primer Sealer

interior solventborne

A-LL1579004 12/22

#### SAFETY PRECAUTIONS

Read label before use. Keep out of reach of children. Causes skin irritation. Causes serious eye irritation. May cause an allergic skin reaction. May cause damage to organs through prolonged or repeated exposure. Suspected of causing cancer. Toxic to aquatic life with long lasting effects.

#### PRECAUTIONS

DO NOT BREATHE MISTS, VAPOURS OR SPRAYS. DO NOT EAT, DRINK OR SMOKE WHILE USING.

Store in original or correctly labelled container, tightly closed, in a well-ventilated area indoors, away from foodstuffs, at an ambient temperature and avoid freezing conditions. Store locked up. Obtain special instructions before use. Wear protective gloves and clothing, eye and face protection. Ground and bond container and receiving equipment. Use explosion-proof electrical, ventilating, lighting and intrinsically safe equipment. Use non-sparking tools. Take action to prevent static discharges. Avoid release to the environment.

#### FIRST AID

IF SWALLOWED: Rinse mouth. Call a POISON CENTRE, doctor or first aider if you feel unwell.

IF INHALED: Remove to fresh air and keep at rest in a position comfortable for breathing.

IF ON SKIN (or hair): Wash with plenty of soap and water. If skin irritation or rash occurs get medical advice or attention. Take off contaminated clothing and wash before reuse.

IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses if present and easy to do so. Continue rinsing. If eye irritation persists get medical advice or attention.

If exposed or concerned get medical advice or attention.

If medical advice is required have product container or label at hand.

Further information can be obtained from

AUST: POISONS INFORMATION CENTRE 131 126

or call Resene 1800 738 383.

NZ: NATIONAL POISONS CENTRE 0800 POISON (764 766)

or call Resene 0800 737 363.

CONTAINS: Methyl Ethyl Ketoxime 1-10 g/L, Naphtha Petroleum, heavy, hydrotreated 120-380 g/L.

For use as a decorative/protective coating.

**SPILLS:** Wear appropriate protective clothing. Absorb with sand or earth. Collect and seal in properly labelled drums. Do not allow to enter drains or to run off into waterways. Refer to local waste management authority.

**CLEANING PAINT EQUIPMENT:** Brush/roll out as much paint as possible on to newspaper before washing out brushes/rollers with Resene Brush Cleaner or mineral turps. Do not allow mineral turps to enter any drains. Refer to your local Council for disposal of dirty mineral turps.

**FIRE:** Use foam, carbon dioxide or dry chemical powder.



**WHITE**  
If tinted, only tint to Varishade 1

Resene AquaLAQ NGR Primer Sealer is a single pack solventborne non grain raising primer sealer designed for kitchens, shop fittings and furniture finishing. Designed for easy overcoating with Resene AquaLAQ Colour Coat. The rheology of Resene AquaLAQ minimises applicator error.

#### Preparation

• Ensure substrates to be coated are in sound condition, dry, free from dirt, dust, loose material, oil (including mineral oil based wood finishes or similar) and salt.

• **All sanding dusts may be harmful and appropriate protection must be worn. In particular dusts from old lead or chromate based paints or old building materials containing asbestos may be injurious to health if inhaled or ingested. Seek expert advice if the presence of these materials is suspected.**

• For new work ensure the surface is sanded to a smooth finish and dusted off. Round all sharp edges. Ensure the surface is dry before painting.

• This product may be used to paint a wide variety of surfaces. If the surface you propose to paint is unsound or not referred to, try a small test area first or contact your local Resene ColorShop or reseller for advice.

#### Application

• Ensure you have read the detailed Resene AquaLAQ application sheet available from Resene prior to application of product.

• Apply 1-2 coats by spray allowing at least 30 minutes before overcoating.


• Maintain good ventilation throughout the drying and post application curing period to ensure the paint is properly cured. This may require use of an extraction system. Multiple air changes are required during application and until product is cured sufficiently. Ensure humidity is less than 65% and temperature 15-25°C for ideal application and curing. Poor ventilation may affect appearance and performance.

#### Maintenance

**(after a minimum of four weeks' drying)** See the Resene Caring for your paint finish brochure or the Resene website for full cleaning instructions.

#### Be PaintWise

For tips on responsible disposal of paint, cleaning equipment and minimising the impact of your decorating on the environment see the Resene website. Do not discharge any paint into the environment. Resene PaintWise accepts residual unwanted paint and packaging. Or contact your Local Authority for disposal information.

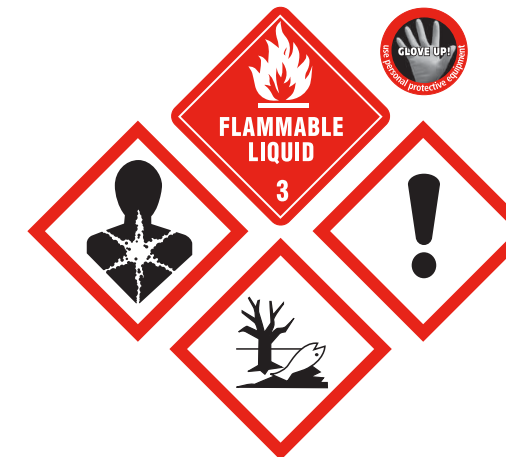

UN NO. 1263 - PAINT RELATED MATERIAL

#### FLAMMABLE LIQUID AND VAPOUR

Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking.

**Resene**

the paint the professionals use

**Resene**

Automotive & Light Industrial

In Australia: Resene Paints (Aust) Limited  
7 Production Ave, PO Box 918, Ashmore City, QLD 4214  
Ph 1800 738 383 Visit [resene.com.au](http://resene.com.au)

In New Zealand: Resene Paints Limited  
Vogel St, PO Box 38242, Wgtn Mail Centre, Lower Hutt 5045  
Ph (04) 577 0500 Visit [resene.co.nz](http://resene.co.nz)

Resene Automotive & Light Industrial  
PO Box 62282, Sylvia Park, Auckland 1644  
Call (09) 259 2738, Fax (09) 259 2937

visit [reseneauto.co.nz](http://reseneauto.co.nz) or email us at [info@reseneauto.co.nz](mailto:info@reseneauto.co.nz)

Made in manufacturing facilities which comply with ISO 9001 and ISO 14001. Printed on paper produced in manufacturing facilities which comply with environmental management systems EMAS and ISO 14001, using vegetable-based inks. Please recycle.

#### Quick check

**Use on:** Kitchens, shop fittings and furniture finishing, over correctly prepared MDF board and wood substrates. May also be used on window joinery.

**Coverage:** 8-10 square metres per litre per coat.

**Dry time (minimum):** Touch dry 10-15 minutes.

Maintain good ventilation throughout the drying and post application curing period to ensure the paint is properly cured. This may require use of an extraction system. Multiple air changes are required during application and until product is cured sufficiently. Ensure humidity is less than 65% and temperature 15-25°C for ideal application and curing. Poor ventilation may affect appearance and performance.

**Recoat time (minimum):** 30 minutes.

**Usual number of coats:** 1-2.

**Application method:** Spray - pressure pot, suction or gravity. Small areas may be brushed or rolled if necessary.

**Thinning:** Do not thin. Consult Resene if needed.

**Clean up:** Mineral turps.

**Before use:** Stir well with a wide flat stirrer, mixing from the bottom of the pail towards the top.

Enjoy the Resene Promise of quality on premium paints. See your Resene ColorShop or the Resene website for a copy.

In every case it is recommended that the appropriate Data Sheet and Safety Data Sheet are consulted prior to application.

Please ensure that use of this product is compatible with the substrate and surface preparation method and that the colour in this container is the same as selected. When using multiple packs of this product on the same project please mix them together before use. Resene does not accept any responsibility for the application of incorrect product to substrate or the application of incorrect colours. Resene products are designed to be used as a system for optimal results. Substitution may cause substandard results or system failure. For further painting advice and information, call 1800 738 383 (AUST), 0800 737 363 (NZ) or visit the Resene website.