

Resene product labels are updated from time to time. This label is provided as a guide for this product and may differ from the label on the container you purchase. Please discuss your project with your local Resene ColorShop team or reseller to ensure you have the right products to give you the best quality finish for your specific project.

net contents  
10 litres

LL8560110 5/19

#### SAFETY PRECAUTIONS

Read label before use. Keep out of reach of children. Causes mild skin irritation. Harmful to aquatic life with long lasting effects.

#### PRECAUTIONS

USE WITH ADEQUATE VENTILATION. DO NOT EAT, DRINK OR SMOKE WHILE USING.

Store in original or correctly labelled container, tightly closed, in a well ventilated area indoors, away from foodstuffs, at an ambient temperature and avoid freezing conditions. Avoid release to the environment.

#### FIRST AID

**IF INHALED:** If breathing is difficult, remove to fresh air and keep at rest in a position comfortable for breathing.

**IF SWALLOWED:** Rinse mouth. Call a POISON CENTRE, doctor or first aider if you feel unwell.

**IF ON SKIN (or hair):** Rinse skin with plenty of soap and water. If skin irritation or rash occurs get medical advice or attention.

**IF IN EYES:** Rinse cautiously with water for several minutes. If eye irritation persists get medical advice or attention.

When seeking medical advice take this container with you.

Further information can be obtained from

AUST: POISONS INFORMATION CENTRE 131 126

or call Resene 1800 738 383.

NZ: NATIONAL POISONS CENTRE 0800 POISON (764 766)

or call Resene 0800 737 363.

For full technical instructions see Data Sheet D905.

**SPILLS:** Wear appropriate protective clothing. Absorb with sand or earth. Collect and seal in properly labelled drums. Do not allow to enter drains or to run off into waterways. Refer to local waste management authority.

**CLEANING PAINT EQUIPMENT:** Brush/roll out as much paint as possible onto newspaper before washing brushes and rollers. Dispose of wash-up water onto grassy/unsealed area or into inside sink/basin, NOT into outside stormwater drain where it may harm fish in local waterways.

**BE PAINTWISE:** For tips on responsible disposal of paint, cleaning equipment and minimising the impact of your decorating on the environment see the Resene website. Do not discharge any paint into the environment. Resene PaintWise (NZ) or paintback.com.au (Australia) accepts residual unwanted paint and packaging. Or contact your Local Authority for disposal information.

Please ensure that use of this product is compatible with the substrate and surface preparation method and that the colour in this container is the same as selected. When using multiple packs of this product on the same project please mix them together before use. Resene does not accept any responsibility for the application of incorrect product to substrate or the application of incorrect colours. Resene products are designed to be used as a system for optimal results. Substitution may cause substandard results or system failure. For further painting advice and information, call 1800 738 383 (AUST), 0800 737 363 (NZ) or visit the Resene website.


# WARNING

KEEP OUT OF REACH OF CHILDREN

# FilmPro

## professional set paint

### waterborne exterior/interior

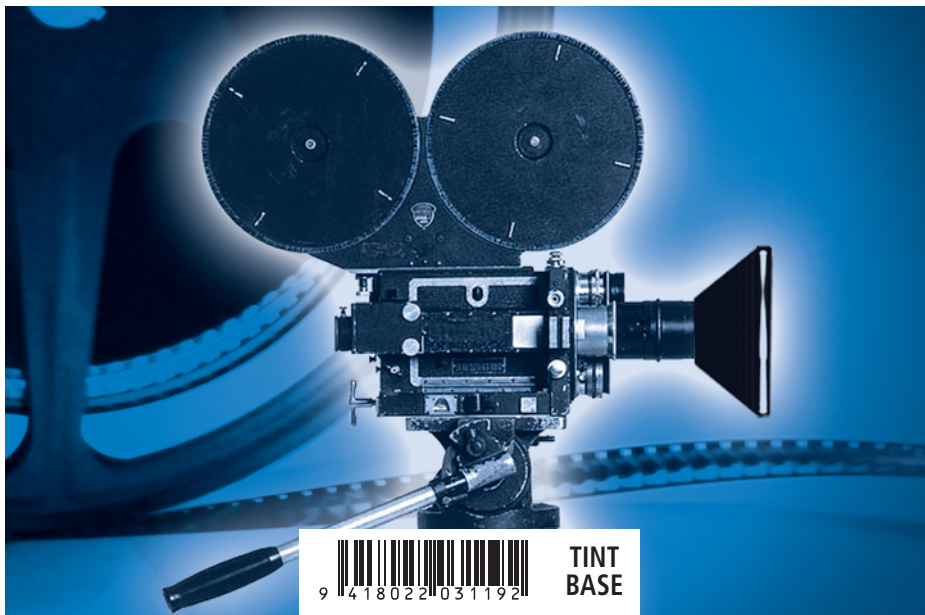

9 418022 031192

TINT  
BASE

Resene FilmPro is a tough waterborne finish designed to colour and enhance sets.

#### Application

- Ensure substrates to be coated are in sound condition, dry, free from dirt, dust, loose material, oil (including mineral oil based wood finishes or similar) and salt.
- Remove accumulated windblown salt by washing with Resene Paint Prep and Housewash (see Data Sheet D812).
- **Coverage:** 12 square metres per litre per coat. Coverage will vary dependent on surface porosity and profile. Use two coats of Resene Howzat as an undercoat under Resene Digital Green.
- **Dry time (minimum):** 30 minutes at 18°C. Do not apply at temperatures below 10°C or when temperatures are liable to drop below this during the drying period.
- **Recoat time (minimum):** 2 hours. Drying is slowed by low temperatures and high humidity. Do not apply under damp conditions.
- **Usual number of coats:** 1-3 depending on finish or effect required.
- Stir with a wide flat stirrer prior to application. Do not shake or brush excessively.
- **Application method:** Synthetic fibre roller, brush, speed brush or spray. First coat may be thinned 10% with water. Subsequent coats should be applied undiluted.
- **Thinning and clean up:** Water.

Enjoy the Resene Promise of quality on premium paints. See your Resene ColorShop or the Resene website for a copy.

In every case it is recommended that the appropriate Data Sheet and Safety Data Sheet are consulted prior to application.



Filmpro SDS

## Resene

the paint the professionals use



Filmpro TDS

In Australia: Resene Paints (Aust) Limited  
7 Production Ave, PO Box 924, Beenleigh, Qld 4207  
Ph 1800 738 383 Visit [www.resene.com.au](http://www.resene.com.au)

In New Zealand: Resene Paints Limited  
Vogel St, PO Box 38242, Wgtn Mail Centre, Lower Hutt 5045  
Ph (04) 577 0500 Visit [www.resene.co.nz](http://www.resene.co.nz)

Manufactured under a quality system certified as complying with ISO9001 by Telarc SAI, an accredited certification body. Printed on environmentally responsible paper, which complies with the requirements of environmental management systems EMAS and ISO14001, using vegetable-based inks.