

Resene product labels are updated from time to time. This label is provided as a guide for this product and may differ from the label on the container you purchase.
Please discuss your project with your local Resene ColorShop team or reseller to ensure you have the right products to give you the best quality finish for your specific project.

SAFETY PRECAUTIONS

Read label before use. Keep out of reach of children. May be harmful if swallowed and enters airways. Causes skin irritation. May cause an allergic skin reaction. Causes serious eye irritation. Suspected of causing cancer. Suspected of damaging fertility or the unborn child. Toxic to aquatic life with long lasting effects.

PRECAUTIONS

AVOID BREATHING MISTS, VAPOURS, SPRAYS. DO NOT EAT, DRINK OR SMOKE WHILE USING.

Store in original or correctly labelled container, tightly closed, in a well ventilated area indoors, away from foodstuffs, either between 15°C-20°C or at a cool, constant temperature. Store locked up. Wear protective gloves and clothing, eye and face protection. Use personal protective equipment as required. Ground or bond container and receiving equipment. Use explosion-proof electrical, ventilating, lighting and intrinsically safe equipment. Use only non-sparking tools. Avoid release to the environment. Contaminated work clothing should not be allowed out of the workplace. Dispose of empty container safely. Consult Resene checklist on environmentally acceptable methods for cleaning equipment and disposing of unwanted paint.

FIRST AID

IF SWALLOWED: DO NOT induce vomiting. Immediately call a POISON CENTRE, doctor, physician or first aider.

IF ON SKIN (or hair): Wash with plenty of soap and water. If skin irritation or rash occurs get medical advice or attention, Take off contaminated clothing and wash before reuse.

IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses if present and easy to do so. Continue rinsing. If eye irritation persists get medical advice or attention.

IF INHALED: If breathing is difficult, remove to fresh air and keep at rest in a position comfortable for breathing. If experiencing respiratory symptoms: Call a POISON CENTRE or doctor/physician.

If exposed or concerned: Get medical advice or attention.

If medical advice is required have product container or label at hand.

Further information can be obtained from

AUST: POISONS INFORMATION CENTRE 131 126 or call Resene 1800 738 383.

NZ: NATIONAL POISONS CENTRE 0800 POISON (764 766)

or call Resene 0800 737 363.

CONTAINS: Methyl Ethyl Ketoxime 1-15 gms/L, Zinc Phosphate 15-130 gms/L, Solvent Naphtha Petroleum Medium Aliphatic 130-395 gms/L, Solvent Naphtha Petroleum, Heavy Aromatic 1-15 gms/L, Xylene 1-15 gms/L, Ethylbenzene 2 gms/L. For use as a surface preparation coating.

For full technical instructions see Data Sheet D411.

SPILLS: Clean up spillage. Wear appropriate protective clothing. Absorb with sand or earth. Collect and seal in properly labelled drums. Do not allow to enter drains or to run off into waterways. Refer to local waste management authority.

CLEANING PAINT EQUIPMENT: Brush/roll out as much paint as possible on to newspaper before washing out brushes/rollers with Resene Brush Cleaner or mineral turps. Do not allow mineral turps to enter any drains. Refer to your local Council for disposal of dirty mineral turps.

FIRE: Use foam, carbon dioxide or dry chemical powder.


WARNING

KEEP OUT OF REACH OF CHILDREN

Resene

GP Metal Primer

general purpose
solventborne exterior/interior

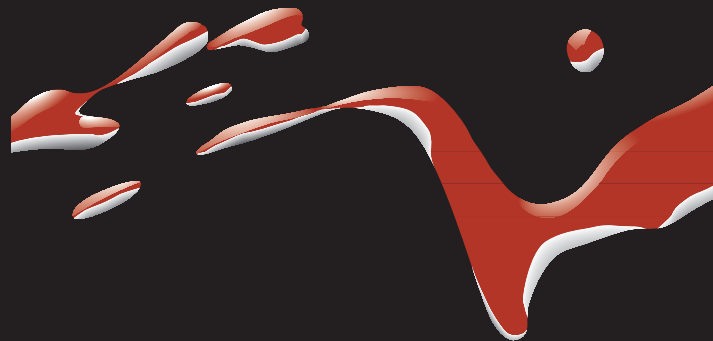

Resene GP Metal Primer is an all-purpose high build primer for metals. Based on a non saponifiable resin and a blend of anti-corrosive pigments. Specially developed for priming a range of new and weathered metals.

Preparation

- Ensure substrates to be coated are in sound condition, dry, free from dirt, dust, loose material, oil (including mineral oil based wood finishes or similar) and salt.
- Remove accumulated windblown salt by washing with Resene Paint Prep and Housewash (see Data Sheet D812).
- Waterblasting is the best surface preparation prior to repainting of weathered galvanised steel and Zinalume.
- Treat areas of moss, mould or lichen growth with Resene Moss & Mould Killer (see Data Sheet D80). Extended times will be required to ensure lichen growth will detach from the substrate. Remove all loose or flaking paint and wash thoroughly as above (waterblasting will assist removal of lichen growth). Pay particular attention to paint immediately adjacent to flaking areas as adhesion is often suspect.
- Remove oil and grease using Resene Roof and Metal Wash (see Data Sheet D88). Flush clean with water.
- Remove all loose corrosion products (red or white rusting) by thorough power wire brushing or use of a sacrificial disc such as 3M Rust and Paint Removal disc. Spot prime bare areas with Resene GP Metal Primer. For badly corroded areas apply an additional coat of Resene GP Metal Primer or consult the Resene Engineered Coating Systems Division for specialist advice.
- Areas showing significant red rusting will require an additional coat of Resene GP Metal Primer or a change to Resene Rust-Arrest (see Data Sheet RA30A).
- May be used on roofs that are to be used for the collection of drinking water when topcoated. If roof is used for the collection of drinking water disconnect downpipes until total paint system has been applied and has received its first heavy shower of rain. Divert run-off water to a grassed area for the first two to three showers.

All sanding dusts may be harmful and appropriate protection must be worn. In particular dusts from old lead or chromate based paints or old building materials containing asbestos may be injurious to health if inhaled or ingested. Seek expert advice if the presence of these materials is suspected.

This product may be used to paint a wide variety of surfaces. If the surface you propose to paint is unsound or not referred to, contact your local Resene ColorShop or Reseller.

Application

- Apply Resene GP Metal Primer by brush, roller or spray (may require judicious thinning). Thinning requirements will vary with application method. On weathered surfaces, brush or roller application is preferred to provide the mechanical force to work the surface for intimate contact.
- For new work/weathered unpainted, the best results are obtained by

brush to ensure maximum contact with the metal. Apply one full coat of Resene GP Metal Primer and allow at least 12 hours before recoating (primer must be hard dry to overcoat). For severe marine exposures and non-rainwashed areas, such as the undersides of metal gutters, apply a second coat of Resene GP Metal Primer.

- For repaints, spot prime all bare and lightly rusted areas with one coat of Resene GP Metal Primer. Where severe corrosion is present, apply a second coat of Resene GP Metal Primer, allowing a minimum of 12 hours between coats.

Be PaintWise

For tips on minimising the impact of your decorating on the environment see the Resene website.



UN NO. 1263 - PAINT RELATED MATERIAL



In Australia: Resene Paints (Aust) Limited
7 Production Ave, PO Box 924, Beenleigh, QLD 4207
Phone 1800 738 383 Fax 1800 064 960
Email advice@resene.com.au or visit www.resene.com.au

In New Zealand: Resene Paints Limited
Vogel Street, PO Box 38242, Wellington Mail Centre, Lower Hutt 5045
Phone (04) 577 0500 Fax (04) 577 0600
Email advice@resene.co.nz or visit www.resene.co.nz

Manufactured under a quality system certified as complying with ISO9001 by Telarc SAJ, an accredited certification body. Printed on environmentally responsible paper, which complies with the requirements of environmental management systems EMAS and ISO14001, using vegetable-based inks.

Quick check

Use on: Aluminium, galvanising, repaints, steel and Zinalume.

Gloss level: Satin.

Coverage: 7 square metres per litre per coat.

Dry time (minimum): 5 hours at 18°C (depends upon film build).

Recoat time (minimum): 12 hours. Drying is slowed by low temperatures and high humidity. Do not apply under damp conditions.

Usual number of coats: Usually one.

Application method: Brush, roller or spray.

Thinning and clean up: Brush/roller: Mineral turps or Resene Thinner No.2; spray: Resene Thinner No.6.

Colour range: Light grey.

Before use: Stir well with a wide flat stirrer.

Enjoy the Resene Promise of quality on premium paints. See your Resene ColorShop or the Resene website for a copy.

In every case it is recommended that the appropriate Data Sheet and Safety Data Sheet are consulted prior to application.

FLAMMABLE LIQUID AND VAPOUR

Keep away from heat, sparks, open flames and hot surfaces. No smoking.

Please ensure that use of this product is compatible with the substrate and surface preparation method and that the colour in this container is the same as selected. Resene does not accept any responsibility for the application of incorrect product to substrate or the application of incorrect colours. Resene products are designed to be used as a system for optimal results. Substitution may cause substandard results or system failure. For further painting advice and information, call 1800 738 383 (AUST), 0800 737 363 (NZ) or visit the Resene website.