

Resene product labels are updated from time to time. This label is provided as a guide for this product and may differ from the label on the container you purchase.
Please discuss your project with your local Resene ColorShop team or reseller to ensure you have the right products to give you the best quality finish for your specific project.

net contents
1 litre

LL8090001 12/21

SAFETY PRECAUTIONS

Read label before use. Keep out of reach of children. Harmful in contact with skin. Harmful if inhaled. Harmful if swallowed. Causes skin irritation. Causes serious eye irritation. May cause damage to organs. May cause damage to organs through prolonged or repeated exposure. Suspected of damaging fertility or the unborn child. May cause long lasting harmful effects to aquatic life. Harmful to terrestrial vertebrates.

PRECAUTIONS

DO NOT BREATHE MIST, VAPOURS OR SPRAY. DO NOT EAT, DRINK OR SMOKE WHEN USING THIS PRODUCT.

Store in original or correctly labelled container, tightly closed, in a well ventilated area indoors, away from foodstuffs, at an ambient temperature and avoid freezing conditions. Wear protective gloves and clothing, eye and face protection. Ground and bond container and receiving equipment. Wash all exposed external body areas thoroughly after handling. Avoid release to the environment. Obtain special instructions before use.

FIRST AID

IF SWALLOWED: Rinse mouth. Call a POISON CENTRE, doctor or first aider if you feel unwell.

IF ON SKIN (or hair): Wash with plenty of soap and water. If skin irritation occurs get medical advice. Take off immediately all contaminated clothing.

IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses if present and easy to do so. Continue rinsing. If eye irritation persists get medical advice or attention.

IF INHALED: Remove to fresh air and keep at rest in a position comfortable for breathing.

IF BREATHING DIFFICULT GET MEDICAL ATTENTION IMMEDIATELY.

When seeking medical advice take this container with you. If exposed or concerned get medical advice or attention.

If exposed or concerned call a Poison Centre.

Further information can be obtained from

AUST: POISONS INFORMATION CENTRE 131 126

or call Resene 1800 738 383.

NZ: NATIONAL POISONS CENTRE 0800 POISON (764 766)

or call Resene 0800 737 363.

CONTAINS: Ethylene glycol monoisopropyl ether 170-450 g/L, Xylene 350-630 g/L.

For use as a paint thinner.

SPILLS

Eliminate all sources of ignition. Ventilate area, avoid breathing vapours.

Use absorbent clean-up materials, such as fire retardant treated sawdust or diatomaceous earth to dike and contain spill. Scrape up and remove.

Collect and seal in properly labelled drums. Refer to local waste management authority. Keep out of public sewers and waterways.

FIRE

Blanket flames with dry chemical, carbon dioxide or foam. Wear self-contained breathing apparatus. Closed containers may explode when exposed to extreme heat.

The storage of flammable goods may require certification/licencing by the appropriate agency.

Consult the local Dangerous Goods Inspectorate.

Dispose of unwanted material in accordance with Local Body Regulations.

In every case it is recommended that the Safety Data Sheet is consulted prior to application.

Be PaintWise

For tips on responsible disposal of paint, cleaning equipment and minimising the impact of your decorating on the environment see the Resene website. Do not discharge any paint into the environment. Resene PaintWise (NZ) or paintback.com.au (Australia) accepts residual unwanted paint and packaging. Or contact your Local Authority for disposal information.

WARNING

KEEP OUT OF REACH OF CHILDREN

Resene Thinner No.9



Quick check

Thinner	Product
Mineral Turps	Mica Bond
No.2	Lusta-Glo; Super Gloss; Sureseal
No.3A	ArmourZinc 125
No.4	Vinyl Etc
No.5	Armourcote 608; Steel Fab
No.6	Armourcote 210 and 510; Alumastic; Imperite I.F. 503; Armourchlor Series (spray application); ArmourZinc 110
No.7A	Polymeric AV-8; Uracryl 400 Series (spray application)
No.8	Uracryl 400 Series (brush/roller application)
No.9	Zincilate 11
No.10	Slow Retarder; Rust-Arrest (brush/roller application)
No.11	Brush/roller application – Armourchlor Series; ArmourZinc 110; Steel Fab. Armourcote 515 (application above 35°C or over zinc rich primers); Medium Retarder
No.12	ArmourZinc 120; Armourcote 220, 512 and 515; Universal Cleaner; Rust-Arrest (spray application)
No.13	Imperite 413
No.17	Uracryl 800 Series, Uracryl GraffitiShield

Refer to appropriate Product Data Sheet and Safety Data Sheet prior to application of, or clean up after use of, Resene Engineered Coating Systems products.

For further painting advice and information, call 1800 738 383 (AUST), 0800 737 363 (NZ) or visit the Resene website.


Resene

the paint the professionals use

In Australia: Resene Paints (Aust) Limited
7 Production Ave, PO Box 918, Ashmore City, QLD 4214
Ph 1800 738 383 Visit resene.com.au

In New Zealand: Resene Paints Limited
Vogel St, PO Box 38242, Wgtn Mail Centre, Lower Hutt 5045
Ph (04) 577 0500 Visit resene.co.nz

Manufactured under a quality system certified as complying with ISO 9001 by Telarc SAI, an accredited certification body. Printed on paper produced in manufacturing facilities which comply with environmental management systems EMAS and ISO 14001, using vegetable-based inks. Please recycle.

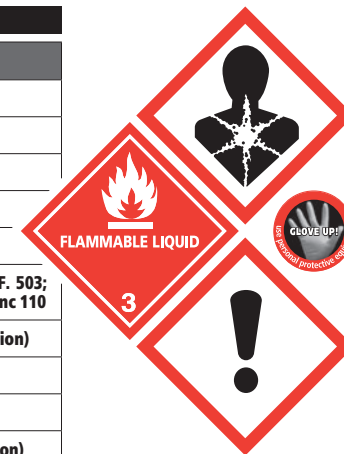

UN NO. 1263 – PAINT
RELATED MATERIAL

**FLAMMABLE LIQUID
AND VAPOUR**

Keep away from heat,
hot surfaces, sparks, open
flames and other ignition
sources. No smoking.



Safety Data
Sheets