

Resene product labels are updated from time to time. This label is provided as a guide for this product and may differ from the label on the container you purchase.
Please discuss your project with your local Resene ColorShop team or reseller to ensure you have the right products to give you the best quality finish for your specific project.

net contents 1 Litre
(includes tinters in base)

A-LL5961301 3/21

SAFETY PRECAUTIONS

Read label before use. Keep out of reach of children. May cause damage to organs through prolonged or repeated exposure. Harmful if inhaled. Harmful if swallowed. Causes serious eye irritation. Suspected of damaging fertility or the unborn child. Causes skin irritation. May be harmful in contact with skin. May cause an allergic skin reaction. May be harmful if swallowed and enters airways. Suspected of causing cancer. Toxic to aquatic life. Harmful to terrestrial vertebrates.

PRECAUTIONS

DO NOT BREATHE MISTS, VAPOURS OR SPRAYS. DO NOT EAT, DRINK OR SMOKE WHEN USING THIS PRODUCT.

Store in original or correctly labelled container, tightly closed, in a well-ventilated area indoors, away from foodstuffs, at an ambient temperature and avoid freezing conditions. Store locked up. Wear protective gloves and clothing, eye and face protection. Ground and bond container and receiving equipment. Use explosion-proof electrical, ventilating, lighting and intrinsically safe equipment. Avoid release to the environment. Obtain special instructions before use.

FIRST AID

IF SWALLOWED: Immediately call a POISON CENTRE, doctor or first aider. Do NOT induce vomiting.

IF ON SKIN (or hair): Wash with plenty of soap and water. If skin irritation occurs get medical advice or attention. Take off contaminated clothing and wash it before reuse.

IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses if present and easy to do so. Continue rinsing. If eye irritation persists get medical advice or attention.

IF INHALED: If breathing is difficult, remove to fresh air and keep at rest in a position comfortable for breathing. If experiencing respiratory symptoms call a POISON CENTRE, doctor or first aider.

If exposed or concerned: call a POISON CENTRE or doctor/physician. If medical attention is required: have product container or label at hand.

Further information can be obtained from
AUST: POISONS INFORMATION CENTRE 131 126 or call Resene 1800 738 383.

NZ: NATIONAL POISONS CENTRE 0800 POISON (764 766) or call Resene 0800 737 363.

CONTAINS: Xylene 120-620 g/L, Ethylbenzene 10-120 g/L, Methyl Ethyl Ketoxime <10 g/L, 1,2,4-Trimethyl Benzene 1-120 g/L, Toluene 0-120 g/L, Cyclohexane 0-120 g/L, Naphtha Petroleum, Hydrodesulphurised heavy 0-140 g/L, Naphtha Petroleum, light aromatic solvent 0-120 g/L, N-Hexane 0-120 g/L. For use as a decorative/protective coating.

For full technical instructions see Data Sheet RA72.

SPILLS: Wear appropriate protective clothing. Absorb with sand or earth. Collect and seal in properly labelled drums. Do not allow to enter drains or to run off into waterways. Refer to local waste management authority.

CLEANING PAINT EQUIPMENT: Brush/roll out as much paint as possible on to newspaper before washing out brushes/rollers with the recommended thinner. Do not allow thinner to enter any drains. Refer to your local Council for disposal of dirty thinner.

FIRE: Use foam, carbon dioxide or dry chemical powder for extinction.

DANGER
KEEP OUT OF REACH OF CHILDREN

Resene

Armourcote 608

fast-dry enamel

Engineered Coating Systems



SILVER


Resene Armourcote 608 is a high gloss, fast-dry enamel based on a modified polyester resin. Durability, colour and gloss retention is typical of high quality gloss enamels.

General

- Safety Data Sheet (SDS) is available and must be consulted before use.
- In every case it is recommended that the current Resene Data Sheet is consulted for product data and surface preparation information.
- Stir well before use.
- Thinning requirements may vary according to application method, equipment and environmental conditions.
- If thinning is required thoroughly re-mix using the power mixer.
- Ensure correct wet film thickness is applied to achieve desired dry film thickness. Allowance must be made for any thinner added.
- Use of incorrect thinner may have an adverse effect on application and performance.
- Drying is affected by low temperatures and high humidity.
- The temperature of the substrate should be 3°C above the "Dew Point".
- The "Dew Point" requirement can be presumed to be satisfied if a thin clearly defined film of water applied to the cleaned surface with a damp cloth evaporates within 15 minutes.
- Following appropriate preparation, all surfaces must be dry and clean prior to painting.
- This product may be used to paint a wide variety of surfaces. If the surface you propose to paint is unsound or not referred to, contact your local Resene ColorShop or reseller for your nearest Technical Representative.

Be PaintWise

For tips on responsible disposal of paint, cleaning equipment and minimising the impact of your decorating on the environment see the Resene website. Do not discharge any paint into the environment. Resene PaintWise (NZ) or paintback.com.au (Australia) accepts residual unwanted paint and packaging. Or contact your Local Authority for disposal information.

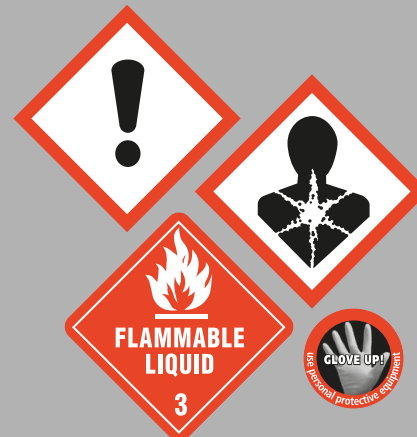

UN NO. 1263 – PAINT RELATED MATERIAL

HIGHLY FLAMMABLE LIQUID AND VAPOUR
Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking



Resene

the paint the professionals use



In Australia: Resene Paints (Aust) Limited
7 Production Ave, PO Box 924, Beenleigh, Qld, 4207
Ph 1800 738 383 Visit www.resene.com.au

In New Zealand: Resene Paints Limited
Vogel St, PO Box 38242, Wgtn Mail Centre, Lower Hutt 5045
Ph (04) 577 0500 Visit www.resene.co.nz

Manufactured under a quality system certified as complying with ISO9001 by Telarc SAI, an accredited certification body. Printed on paper produced in manufacturing facilities which comply with environmental management systems EMAS and ISO 14001, using vegetable-based inks. Please recycle.

Quick check

Name: Resene Armourcote 608.

Generic type: Oil modified polyester.

Colour: Silver, White, selected BS 381C, 2660, 5252, Resene Total Colour System, White Colours and The Range.

Finish: Gloss.

Application method: Brush.

Recommended dry film thickness (D.F.T.): 38 microns

Theoretical coverage: 12 square metres per litre per coat at 38 microns D.F.T.

Dry time (minimum): Dry to handle: 2-3 hours at 18°C. Drying is affected by low temperatures and high humidity.

Recoat time: 24 hours at 18°C.

Thinning and clean up: Resene Thinner No.5.

Resene Data Sheet: RA72.

Limitations: Ensure appropriate surface primer is used. Full cure can take up to 10 days.

Enjoy the Resene Promise of quality on premium paints. See your Resene ColorShop or the Resene website for a copy.

In every case it is recommended that the appropriate Data Sheet and Safety Data Sheet are consulted prior to application.

Please ensure that use of this product is compatible with the substrate and surface preparation method and that the colour in this container is the same as selected. When using multiple packs of this product on the same project please mix them together before use. Resene does not accept any responsibility for the application of incorrect product to substrate or the application of incorrect colours. Resene products are designed to be used as a system for optimal results. Substitution may cause standard results or system failure. For further painting advice and information, call 1800 738 383 (AUST), 0800 737 363 (NZ) or visit the Resene website.