


Resene product labels are updated from time to time. This label is provided as a guide for this product and may differ from the label on the container you purchase. Please discuss your project with your local Resene ColorShop team or reseller to ensure you have the right products to give you the best quality finish for your specific project.

# Blacktop

exterior

KEEP OUT OF REACH OF CHILDREN

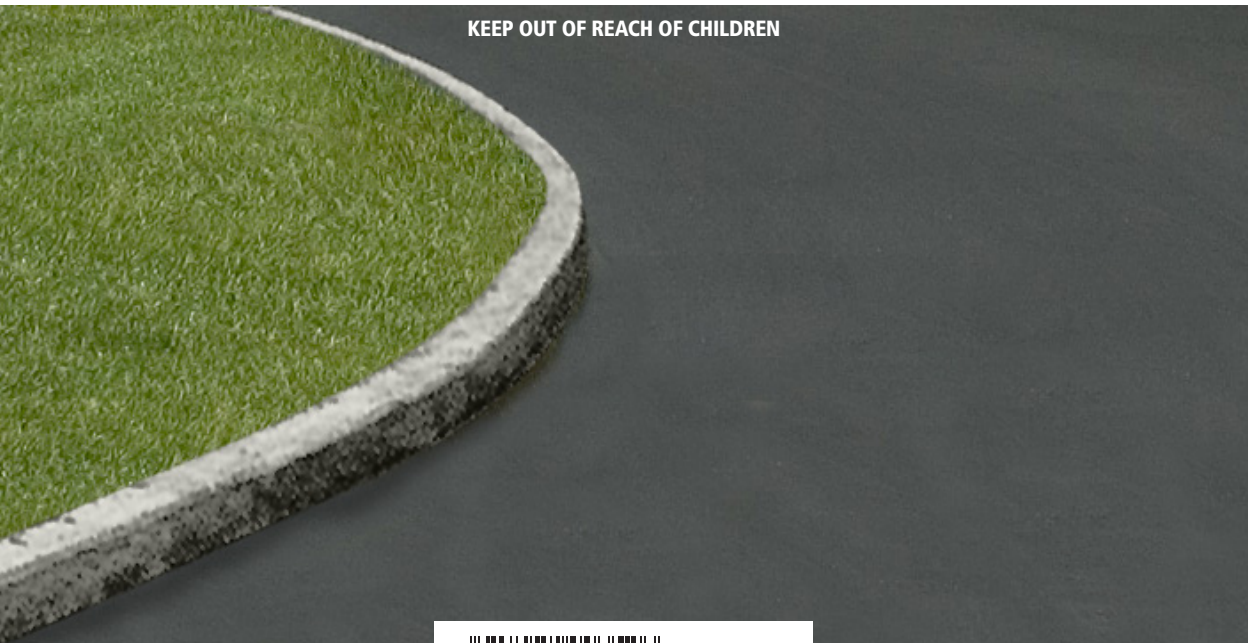

**BLACK**

### SAFETY PRECAUTIONS

Read label before use. Keep out of reach of children. This material is quite bland; with vapour, occasional skin contact and even minor ingestion having negligible hazard. Repeated skin contact may, and any eye contact will, cause irritation.

### PRECAUTIONS

USE WITH ADEQUATE VENTILATION. DO NOT EAT, DRINK OR SMOKE WHILE USING.

Store in original or correctly labelled container, tightly closed, in a well ventilated area indoors, away from foodstuffs, at an ambient temperature and avoid freezing conditions. Avoid release to the environment.

### FIRST AID

IF SWALLOWED: Rinse mouth. Call a POISON CENTRE, doctor or first aider if you feel unwell. IF ON SKIN (or hair): Rinse skin with plenty of soap and water. If skin irritation or rash occurs get medical advice or attention.

IF IN EYES: Rinse cautiously with water for several minutes. If eye irritation persists get medical advice or attention.

IF INHALED: If breathing is difficult, remove to fresh air and keep at rest in a position comfortable for breathing.

When seeking medical advice take this container with you.

Further information can be obtained from AUST: POISONS INFORMATION CENTRE 131 126 or call Resene 1800 738 383.

NZ: NATIONAL POISONS CENTRE 0800 POISON (764 766)

or call Resene 0800 737 363.

For use as a surface preparation coating.

For full technical instructions see Data Sheet D304.

**SPILLS:** Wear appropriate protective clothing. Absorb with sand or earth. Collect and seal in properly labelled drums. Do not allow to enter drains or to run off into waterways. Refer to local waste management authority.

**CLEANING PAINT EQUIPMENT:** Brush/roll out as much paint as possible onto newspaper before washing brushes and rollers. Dispose of wash-up water onto grassy/unsealed area or into inside sink/basin, NOT into outside stormwater drain where it may harm fish in local waterways.

Resene Blacktop is a cold applied, heavy-bodied, slip-resistant topping for rejuvenating aged or worn asphalt. Based on a bitumen emulsion with graded fillers that dries to produce a durable, weather and wear resistant finish. Resene Blacktop is formulated to coat asphalt driveways, paths, tennis courts, playgrounds and recreational areas.

### Preparation

- Ensure substrates to be coated are in sound condition, dry, free from dirt, dust, loose material, oil (including mineral oil based wood finishes or similar) and salt.
- Remove accumulated windblown salt by washing with Resene Paint Prep and Housewash (see Data Sheet D812).
- Treat moss and mould with Resene Moss & Mould Killer (see Data Sheet D80).
- Waterblasting is the best surface preparation prior to coating surfaces.
- Wherever oil or grease are present ensure the surface to be coated is thoroughly cleaned using Resene Paint Prep and Housewash. Flush clean with water.
- Trim side grass and remove all weeds from the surface to be coated.
- Repair holes with a compatible filling system prior to resurfacing.
- Consult your Resene ColorShop or reseller for advice on resurfacing very old oxidised asphalt surfaces.

**This product may be used to coat a wide variety of surfaces. If the surface you propose to coat is unsound or not referred to, try a small test area first or contact your local Resene ColorShop or reseller for advice.**

### Application

- Resene Blacktop should not be applied if rainfall is likely within the recommended drying period.
- Stir well with a wide flat stirrer before and during application.
- For best results use a Resene High Solids roller.

- Pour Resene Blacktop in a long windrow 150-200 mm in width, spread the product evenly over the surface to achieve the recommended coverage.
- If rapid drying is a problem during application, cool the surface to be coated by lightly misting with water. Apply coating as soon as surface water disappears.
- Avoid painting in hot sun.
- Recoat missed or pinholed areas before coating dries.
- Smooth any ridges immediately.
- Repeat procedure until the total area is covered.
- Do not allow roller to become depleted of wet product.
- A single coat is often sufficient. However faster drying will result from multiple application of thinner coats.

### Maintenance

**(after a minimum of four weeks' drying)**

See the Resene Caring for your paint finish brochure or the Resene website for full cleaning instructions.

### Be PaintWise

For tips on responsible disposal of paint, cleaning equipment and minimising the impact of your decorating on the environment see the Resene website. Do not discharge any paint into the environment. Resene PaintWise (NZ) or paintback.com.au (Australia) accepts residual unwanted paint and packaging. Or contact your Local Authority for disposal information.



Blacktop SDS

**Resene**

the paint the professionals use



Blacktop TDS

In Australia: Resene Paints (Aust) Limited  
7 Production Ave, PO Box 924, Beenleigh, Qld 4207  
Ph 1800 738 383 Visit resene.com.au

In New Zealand: Resene Paints Limited  
Vogel St, PO Box 38242, Wgtn Mail Centre, Lower Hutt 5045  
Ph (04) 577 0500 Visit resene.co.nz

Manufactured under a quality system certified as complying with ISO 9001 by Telarc SA, an accredited certification body. Printed on paper produced in manufacturing facilities which comply with environmental management systems EMAS and ISO 14001, using vegetable-based inks. Please recycle.

### Quick check

**Use on:** Asphalt driveways, paths, tennis courts, playgrounds and recreational areas.

**Gloss level:** Matt.

**Coverage:** 0.5-1 square metre per litre per coat. Coverage varies and is dependent upon surface porosity and profile.

**Dry time (minimum):** Touch dry: 4 hours. Pedestrian use: 6 hours. Vehicular use: 48 hours. Do not apply at temperatures below 10°C or when temperatures are liable to drop below this during the drying period. Drying is slowed by low temperatures and high humidity. Do not apply under damp conditions.

**Recoat time (minimum):** 4 hours.

**Usual number of coats:** One.

**Application method:** Resene High Solids roller.

**Thinning and clean up:** Do not thin. Clean up wet material with water. Use Resene Brush Cleaner to remove dry product.

**Colour range:** Black.

**Before use:** Stir well with a wide flat stirrer.

Enjoy the Resene Promise of quality on premium paints. See your Resene ColorShop or the Resene website for a copy.

In every case it is recommended that the appropriate Data Sheet and Safety Data Sheet are consulted prior to application.

Please ensure that use of this product is compatible with the substrate and surface preparation method and that the colour in this container is the same as selected. When using multiple packs of this product on the same project please mix them together before use. Resene does not accept any responsibility for the application of incorrect product to substrate or the application of incorrect colours. Resene products are designed to be used as a system for optimal results. Substitution may cause substandard results or system failure. For further painting advice and information, call 1800 738 383 (AUST), 0800 737 363 (NZ) or visit the Resene website.