

Resene product labels are updated from time to time. This label is provided as a guide for this product and may differ from the label on the container you purchase.  
Please discuss your project with your local Resene ColorShop team or reseller to ensure you have the right products to give you the best quality finish for your specific project.

**SAFETY PRECAUTIONS**

Read label before use. Keep out of reach of children. May be harmful if swallowed. Causes mild skin irritation. Causes serious eye irritation. May cause drowsiness or dizziness. Toxic to aquatic life with long lasting effects.

**PRECAUTIONS**

AVOID BREATHING MISTS, VAPOURS, SPRAYS. DO NOT EAT, DRINK OR SMOKE WHILE USING.

Store in original or correctly labelled container, tightly closed, in a well-ventilated area indoors, away from foodstuffs, at an ambient temperature and avoid freezing conditions. Store locked up. Wear protective gloves and clothing, eye and face protection. Ground and bond container and receiving equipment. Use explosion-proof electrical, ventilating, lighting and intrinsically safe equipment. Use only non-sparking tools. Take action to prevent static discharges. Avoid release to the environment. Collect spillage.

**FIRST AID**

IF SWALLOWED: Immediately call a POISON CENTRE, doctor or physician. Do NOT induce vomiting.

IF ON SKIN (or hair): Remove immediately all contaminated clothing. Rinse skin with water. If skin irritation occurs get medical advice or attention.

IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do so. Continue rinsing. If eye irritation persists get medical advice or attention.

IF INHALED: Remove to fresh air and keep at rest in a position comfortable for breathing.

If exposed or concerned get medical advice or attention.

When seeking medical advice take this container with you.

Further information can be obtained from

AUST: POISONS INFORMATION CENTRE 131 126 or call Resene 1800 738 383.

NZ: NATIONAL POISONS CENTRE 0800 POISON (764 766) or call Resene 0800 737 363.

CONTAINS: Solvent Naphtha Petroleum heavy Aromatic 10-125 g/L.

For use as a surface preparation coating.

For full technical instructions see Data Sheet D41.

**SPILLS:** Clean up spillage. Wear appropriate protective clothing. Absorb with sand or earth. Collect and seal in properly labelled drums. Do not allow to enter drains or to run off into waterways. Refer to local waste management authority.

**CLEANING PAINT EQUIPMENT:** Brush/roll out as much paint as possible on to newspaper before washing out brushes/rollers with Resene Brush Cleaner or mineral turps. Do not allow mineral turps to enter any drains. Refer to your local Council for disposal of dirty mineral turps.

**FIRE:** Use foam, carbon dioxide or dry chemical powder.


**WARNING**

KEEP OUT OF REACH OF CHILDREN

**Resene**

# Galvo One

galvanised steel primer  
solventborne exterior

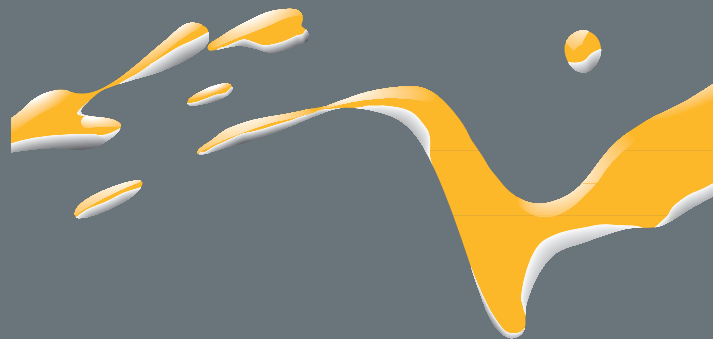

Resene Galvo One is a single pack primer based on alkyd resins and special anti-corrosive pigments. Specially developed for direct application to new and weathered galvanised steel. Effectively welds itself to galvanised steel and stops zinc corrosion. Also suitable for use on Zinalume.

**Preparation**

• Ensure substrates to be coated are in sound condition, dry, free from dirt, dust, loose material, oil (including mineral oil based wood finishes or similar) and salt.

• Remove accumulated windblown salt by washing with Resene Paint Prep and Housewash (see Data Sheet D812).

• Waterblasting is the best surface preparation prior to repainting of weathered galvanised steel and Zinalume.

• If mould is present, treat with Resene Moss & Mould Killer (see Data Sheet D80).

• Remove oil and grease from new roofs using Resene Roof and Metal Wash (see Data Sheet D88). Flush clean with water.

• For old roofs and repaints remove white and red corrosion; loose and flaking paint; dirt, grease and salt, with a combination of scraping, sanding and scrubbing with Resene Roof and Metal Wash. Always rinse with clean water.

• Spot prime red rust with Resene Rust-Arrest (see Data Sheet RA30A) and bare galvanising with Resene Galvo One.

• If roof is used for the collection of drinking water disconnect downpipes until total paint system has been applied and has received its first heavy shower of rain. Divert run-off water to a grassed area for the first two to three showers.

• **All sanding dusts may be harmful and appropriate protection must be worn. In particular dusts from old lead or chromate based paints or old building materials containing asbestos may be injurious to health if inhaled or ingested. Seek expert advice if the presence of these materials is suspected.**

• Consult your Resene ColorShop or reseller for technical advice on painting of badly rusted roofs.

• This product may be used to paint a wide variety of surfaces. If

the surface you propose to paint is unsound or not referred to, contact your local Resene ColorShop or reseller.

**Application**

• Resene Galvo One is best applied by brush to ensure full surface wetting of substrate is achieved.

• Galvanised steel or Zinalume should not be allowed to weather. Apply Resene Galvo One as soon as practical after erection.

• When repainting spot prime all bare areas with one coat of Resene Galvo One and red rusted areas with Resene Rust-Arrest.

**Overcoating**


• For new work apply one full coat of Resene Galvo One and allow 12 hours before recoating.

• For severe coastal environment apply a second coat of Resene Galvo One.

• Resene Galvo One has been developed for use under most roof paints.

**Be PaintWise**

For tips on responsible disposal of paint, cleaning equipment and minimising the impact of your decorating on the environment see the Resene website. Do not discharge any paint into the environment. Resene PaintWise (NZ) or paintback.com.au (Australia) accepts residual unwanted paint and packaging. Or contact your Local Authority for disposal information. Please recycle.

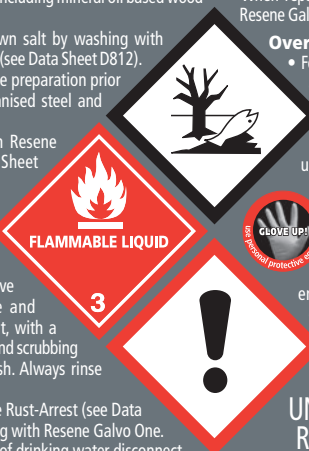

FLAMMABLE LIQUID

3

UN NO. 1263 – PAINT  
RELATED MATERIAL

Galvo One SDS

**Resene**

the paint the professionals use



Galvo One TDS

**Quick check**

**Use on:** Suitably prepared galvanised steel or Zinalume.

**Gloss level:** Satin.

**Coverage:** 12 square metres per litre per coat.

**Dry time (minimum):** 5 hours at 18°C. Drying is slowed by low temperatures and high humidity. Do not apply under damp conditions.

Allow extra drying time when used under high build chlorinated rubber or high performance two pack coatings.

**Recoat time (minimum):** 12 hours.

**Usual number of coats:** Usually one.

**Application method:** Brush, roller or spray.

**Thinning and clean up:** Mineral turps.

**Colour range:** Grey.

**Before use:** Stir well with a wide flat stirrer.

Enjoy the Resene Promise of quality on premium paints. See your Resene ColorShop or the Resene website for a copy.

In every case it is recommended that the appropriate Data Sheet and Safety Data Sheet are consulted prior to application.

**FLAMMABLE LIQUID AND VAPOUR**

Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking.

Please ensure that use of this product is compatible with the substrate and surface preparation method and that the colour in this container is the same as selected. When using multiple packs of this product on the same project please mix them together before use. Resene does not accept any responsibility for the application of incorrect product to substrate or the application of incorrect colours. Resene products are designed to be used as a system for optimal results. Substitution may cause substandard results or system failure. For further painting advice and information, call 1800 738 383 (AUST), 0800 737 363 (NZ) or visit the Resene website.

In Australia: Resene Paints (Aust) Limited  
7 Production Ave, PO Box 918, Ashmore City, QLD 4214  
Ph 1800 738 383 Visit resene.com.au

In New Zealand: Resene Paints Limited  
Vogel St, PO Box 38242, Wgtn Mail Centre, Lower Hutt 5045  
Ph (04) 577 0500 Visit resene.co.nz