

Resene product labels are updated from time to time. This label is provided as a guide for this product and may differ from the label on the container you purchase.  
Please discuss your project with your local Resene ColorShop team or reseller to ensure you have the right products to give you the best quality finish for your specific project.

**SAFETY PRECAUTIONS**

Read label before use. Keep out of reach of children. This material is quite bland; with vapour, occasional skin contact and even minor ingestion having negligible hazard. Repeated skin contact may, and any eye contact will, cause irritation.

**PRECAUTIONS**

USE WITH ADEQUATE VENTILATION. DO NOT EAT, DRINK OR SMOKE WHILE USING.

Store in original or correctly labelled container, tightly closed, in a well-ventilated area indoors, away from foodstuffs, at an ambient temperature and avoid freezing conditions.

**FIRST AID**

IF SWALLOWED: Rinse mouth. Call a POISON CENTRE, doctor or first aider if you feel unwell.

IF ON SKIN (or hair): Rinse skin with plenty of soap and water. If skin irritation or rash occurs get medical advice or attention.

IF IN EYES: Rinse cautiously with water for several minutes. If eye irritation persists get medical advice or attention.

IF INHALED: If breathing is difficult, remove to fresh air and keep at rest in a position comfortable for breathing. If medical advice is required have product container or label at hand.

Further information can be obtained from  
AUST: POISONS INFORMATION CENTRE 131 126  
or call Resene 1800 738 383.

NZ: NATIONAL POISONS CENTRE 0800 POISON (764 766)  
or call Resene 0800 737 363.

For use as a surface preparation coating.

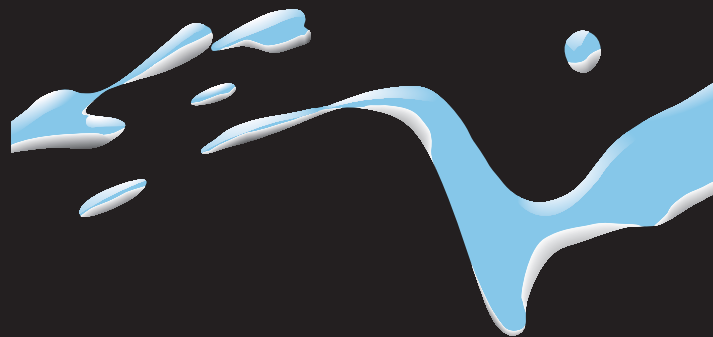
For full technical instructions see Data Sheet D42a.

**SPILLS:** Wear appropriate protective clothing. Absorb with sand or earth. Collect and seal in properly labelled drums. Do not allow to enter drains or to run off into waterways. Refer to local waste management authority.

**CLEANING PAINT EQUIPMENT:** Brush/roll out as much paint as possible onto newspaper before washing brushes and rollers. Minimise water used for washing. Dispose of wash-up water onto grassy/unsealed area away from food crop growing areas and NOT into outside stormwater drain where it may harm fish in local waterways. See [resene.com/cleanup](http://resene.com/cleanup) for cleaning instructions.

# Resene

water  
borne **Sureseal**  
pigmented sealer  
interior

**DO NOT TINT**

Resene Waterborne Sureseal is a pigmented penetrating sealer designed to ready a wide range of interior surfaces ready for topcoating, including old varnishes and Lockwood® finishes. It has excellent adhesion, reduces bleeding of water stains, low VOCs and dries without the unwanted and strong solvent odours associated with traditional solventborne products. Suitable for use in broadwall areas through to wet areas like bathrooms and kitchens. Resene Waterborne Sureseal is a penetrating sealer and should not be regarded as forming part of the film build of the subsequent coating.

**Preparation**

• Ensure surfaces are thoroughly sanded, dry, free from dirt, dust and loose material. A wipe with a damp cloth or sponge will remove most sanding dust.

• Oil and grease must be removed using Resene Paint Prep and Housewash (see Data Sheet D812).

• If mould is present, treat with Resene Moss & Mould Killer (see Data Sheet D80).

• Fill cracks and holes with an appropriate filler before sealing.

• Where staining is present the source must be removed and two coats of Resene Waterborne Sureseal must be used.

• Prepare plasterboard to an appropriate level of finish. Resene Broadwall Surface Prep & Seal (see Data Sheet D807) or Resene Broadwall 3 in 1 (see Data Sheet D810) can be applied to upgrade the level of finish in non-wet areas. If this upgrade system is applied you do not need to seal prior with Resene Waterborne Sureseal.

• To reinstate surfaces after stripping wallpaper, apply Resene Waterborne Sureseal and allow to dry for recommended time. Lightly sand with 180-220 grit sandpaper then apply Resene Broadwall Surface Prep & Seal.

• Prime bare fibrous plaster substrate with solventborne Resene Sureseal (see Data Sheet D42).

• **All sanding dusts may be harmful and appropriate protection must be worn. In particular dusts from old lead or chromate-based paints or old building materials containing asbestos may be injurious to health if inhaled or ingested. Seek expert advice if the presence of these materials is suspected.**

• This product may be used to seal a wide variety of surfaces. If the surface you propose to seal is unsound or not referred to, try a small test area first or contact your local Resene ColorShop or reseller for advice.

**Application**

• Generally one coat is sufficient. Where superior barrier protection/stain resistance is required two coats are recommended.

• When sealing badly aged surfaces Resene Waterborne Sureseal is best applied by brush to ensure full surface wetting is achieved.

• Sanding of plasterboard can loosen fibres that Resene Waterborne Sureseal will then lock in place. Lightly resand after Resene Waterborne Sureseal has dried.

• Maintain good ventilation throughout the drying and post application curing period to ensure the paint is properly cured. This may require use of an extraction system when painting in marginal painting conditions. Do not use gas or diesel burners to heat coated area as these produce water that will inhibit drying and curing. Poor ventilation may affect appearance and performance.

• Resene Waterborne Sureseal is a penetrating sealer and should not be regarded as forming part of the subsequent coating build up. One coat of Resene Waterborne Sureseal cannot be expected to hold back gross staining. The source of the stain must be removed and more than one coat of Resene Waterborne Sureseal employed.

• Contact your nearest Resene Technical representative for advice on spray application.

• Do not apply to wet or damp surfaces.

• Do not use for exterior application, as a consolidation primer or to seal bare fibrous plaster – use solventborne Resene Sureseal.

• Not recommended for laminate or melamine surfaces – use Resene Laminate and Melamine Primer (see Data Sheet D47a) instead.

**Be PaintWise**

For tips on responsible disposal of paint, cleaning equipment and minimising the impact of your decorating on the environment see the Resene website. Do not discharge any paint into the environment. Resene PaintWise (NZ) or [paintback.com.au](http://paintback.com.au) (Australia) accepts residual unwanted paint and packaging. Or contact your Local Authority for disposal information. Please recycle.

Waterborne  
Sureseal SDGWaterborne  
Sureseal TDS

## Resene

the paint the professionals use

In Australia: Resene Paints (Aust) Limited  
7 Production Ave, PO Box 918, Ashmore City, QLD 4214  
Ph 1800 738 383 Visit [resene.com.au](http://resene.com.au)

In New Zealand: Resene Paints Limited  
Vogel St, PO Box 38242, Wgtn Mail Centre, Lower Hutt 5045  
Ph (04) 577 0500 Visit [resene.co.nz](http://resene.co.nz)

**Quick check**

**Use on:** Interior surfaces including baked enamels, glass/ceramics, fibre cement, glazed surfaces, plasterboard and gypsum stoppings, solid plaster, tiles, varnished surfaces and to seal plasterboard prior to wallpapering.

**Gloss level:** Low sheen.

**Coverage:** 10-12 square metres per litre per coat. Resene Waterborne Sureseal is a penetrating sealer and should not be regarded as forming part of the film build of the subsequent coating.

**Dry time (minimum):** 45 minutes at 20°C.

Drying is slowed by low temperatures and high humidity. Do not apply under damp conditions.

**Recoat time (minimum):** 2 hours at 20°C.

**Usual number of coats:** 1-2. Where maximum barrier protection is required, two coats are recommended to ensure all surface pores are sealed.

**Application method:** Best applied by brush/roller ensuring full surface wetting is achieved. Use roller sleeve Resene No.7 (for broadwall areas) or Resene No.4 (for smooth surfaces). If spraying, ensure the spray unit is clean and there is no residual waterborne material in the unit and spray lines.

**Thinning and clean up:** Water. May be thinned with up to 5% clean tap water.

**Colour:** Off-white.

**Before use:** Stir well with a wide flat stirrer.

Enjoy the Resene Promise of quality on premium paints. See your Resene ColorShop or the Resene website for a copy.

In every case it is recommended that the appropriate Data Sheet and Safety Data Sheet are consulted prior to application.

Please ensure that use of this product is compatible with the substrate and surface preparation method and that the colour in this container is the same as selected. Resene does not accept any responsibility for the application of incorrect product to substrate or the application of incorrect colours. Resene products are designed to be used as a system for optimal results. Substitution may cause substandard results or system failure. For further painting advice and information, call 1800 738 383 (AUST), 0800 RESENE (NZ) or visit the Resene website.